

BEST AVAILABLE COPY



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

G204/4097

REC'D 13 OCT 2004
WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Ansower

Dated 4 October 2004

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR

Patents Form 1/77Patents Act 1977
(Rule 16)**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ24SEP03 EB39631-1 C75424
P01/7700 0.00-0322358.3

1. Your reference P 16

2. Patent application number
(The Patent Office will fill in this part)

0322358.3

24 SEP 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

BIOPROGRESS TECHNOLOGY LIMITED
HOSTMOOR AVENUE
MARCH TRADING ESTATE
MARCH
CAMBRIDGESHIRE
PE15 0AX

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

777 4383002

4. Title of the invention

IMPROVEMENTS IN POWDER COMPACTION AND ENROBING

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

BIOPROGRESS TECHNOLOGY LIMITED
HOSTMOOR AVENUE
MARCH TRADING ESTATE
MARCH
CAMBRIDGESHIRE
PE15 0AXMcDonnell Willems
7 Bishopsgate
London EC2A 3AF
777 4383002
126104

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 29 ✓

Claim(s) 0 W~

Abstract 0

Drawing(s) 20 only ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

24/9/03

12. Name and daytime telephone number of person to contact in the United Kingdom

SIMON JONES

01354 602192/

0773 719105

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

Improvements in Powder Compaction and EnrobingField of the Invention

This invention concerns the compacting of powder e.g. a powder containing a medicament, vitamin, dietary supplement etc, and such compacted powder being enrobed by a biodegradable and/or water soluble film, for example a non gelatin film, such as hydroxypropyl methyl cellulosa (HPMC), to produce encapsulated bodies of compacted powder, suitable for dosage forms, e.g. for human ingestion. The invention is applicable to all related dosage forms, including tablets, but for simplicity all such forms will be generally referred herein as capsules.

Background to the Invention

Tablets are a common type of dosage form and various means for improving their properties have been tried. Current methods for coating tablets, such as pharmaceutical tablets include the using of acelacoaters or pan coaters, which spray low molecular weight HPMC grades onto tablets so imparting a surface layer, which is uniform and smooth, but opaque and of low gloss. It is possible for the tablets to have embossed lettering on them. This method of coating tablets is however very time consuming and requires a high level of expertise to produce satisfactory results. Production complications such as tablet twinning are common, where two tablets become

attached to one another during the spray coating operation. In addition to these problems it is necessary to compact the tablets under relatively high pressures so that they do not disintegrate during the coating process. This high level of compaction can have an adverse effect on the disintegration and dissolution rates of active ingredients contained within the capsule, for example, leading to a delay in the release of a drug to a patient, whilst the tablet slowly dissolves in the stomach of the patient.

An alternative to spray or pan coating is to use two-piece hard capsules. These are produced by a dipping process, typically a HPMC solution is used, producing half shells which interlock and thus produce an enclosed capsule. These capsules are typically opaque but glossy, and cannot have any form of embossment, as this would interfere with the overlap interlocking process. The nature of the capsule dictates that there will always be an airspace above the powder fill level. Additionally, it is not possible to compact the powder into these tablets, and this so limits the quantity of powder which can be encapsulated. It follows that this lack of compaction can effectively reduce the amount of e.g. medicament which can be encapsulated. The existence of the air space in the capsule and lack of compaction of the powder contained within the capsule leads to a capsule that is inevitably larger than necessary.

It has also been found that, after manufacture and/or sale of two-piece hard capsules, the capsules can be easily and illegally interfered with, as it is possible to separate the two halves of the capsule and tamper with its contents and replace the two halves back together without there being any obvious change in the capsule's external appearance such to suggest to the user that there was anything wrong with the capsule. This means that it can be difficult to detect capsules which have had their contents tampered with.

HPMC and certain other non-gelatin materials are suitable for ingestion by humans, so delivery capsules with gelatin walls find potential use as ingestible capsules, e.g. for the delivery of accurately metered doses of pharmaceutical preparations and dietary supplements, as a possible replacement for gelatin based capsules. Conventional tablets have already been enrobed. See for example WO 02/098394.

Summary of the Invention

One aspect of the invention concerns a novel method for compacting and enrobing a powder to produce capsules with enhanced properties.

A non gelatin film layer is thermoformed into a suitable tablet shaped pocket under the influence of heat and/or vacuum, and/or pressure. A pre-determined mass of powder is dosed into the film formed pocket, and compressed into a tablet shape e.g. with the aid of a piston or pistons. A

partially enrobed 'soft' tablet results from this process, which is then fully enrobed by a second sequence of events which involves the raising of the tablet above a platten which allows the remainder of the compressed tablet to be enrobed by a second film. Suitable tablet shaped pockets can be created by using e.g. a pair of pistons slideable within a cylinder, such pistons also having the advantage of being able to form pinch points between the platen and the top of cylinders which are useful for cutting away unwanted excess film from the (partially) enrobed tablets.

One of the aims of the present invention is to produce tamper evident capsules.

Another aim of the present invention is to produce powder filled capsules whereby the powder is enrobed with a material which may or may not form a 'skin tight wrap'.

Another aim of the present invention is to produce a capsule with a high gloss surface which is able to adopt an underlying embossment, e.g. to identify a pharmaceutical tablet.

Another aim of the present invention is to produce capsules which have a flange which is almost non-discernable.

Another aim of the present invention is to enable the production of dosage forms in a wide variety of shapes and sizes, which, because of the nature of the processes involved and the properties of the product produced, includes shapes and sizes of dosage forms which have not been previously possible to make or practical to use.

Another aim of the present invention is to produce capsules with favourable properties and which contain powder or other flowable solid material which is at a favourable state of compaction and/or composition, and/or the encapsulating medium of the capsule being fast dissolving or dissolvable (with control) pharmaceutical grade films plasticised with pharmaceutical grade materials.

Another aim of the present invention is to produce capsules, which by their nature, are easy to swallow, and more easily can be conveyed to the site where it is desirable where the active ingredients are most advantageously released.

Another aspect the present invention is a method of powder compaction to produce powder compacted slugs, which, for example can be enrobed to produce capsules which possess enhanced disintegration and dissolution properties over and above traditional tablets.

Another aspect of the present invention is a method of producing a capsule, which, at the very least can perform the same function as a conventional coated tablet, but in which the conventional tablet pressing and coating stages are replaced by a single powder enrobing process.

Another aspect of the present invention is a method of producing a capsule by enrobing powder, in which, because of the nature of capsule produced, certain ancillary ingredients necessary in conventional tablet production, can be omitted. For example, ingredients in a tablet which are added to give the tablet its structural integrity can be omitted, because the active ingredients are in powder form, relatively loosely compacted are encapsulated within a film, such film which now securely packages the powder/ ingredients, thus giving integrity and forming a discrete effective dosage form. Because of the aforementioned, components contained within a tablet which are designed to disperse and break up the tablet when it has reached the site of delivery, can be omitted, as the active ingredients in the capsule according to the present invention are in a non-compacted or at least less compacted form as compared to a conventional tablet, and this lesser compaction leads to the easy release and dispersal of active ingredients once the capsule film has dissolved, e.g. at the intended site of delivery.

Another aspect of the invention provides a method of enrobing compacted powder, comprising vacuum forming a film into a pocket, compacting a powder in said pocket, resulting in a partially enrobed powder slug in a pocket. Vacuum forming a second film over this powder slug to completely enrobe the powder slug, forms a discrete compacted powder filled capsule, suitable for use as a dosage form.

In yet another aspect of the present invention provides a method of enrobing compacted powder using film or films, to form a compacted powder filled capsule, wherein the film or films forming the wall of the compacted powder filled capsule used overlap each other.

In a further aspect of the present invention provides a method of forming and/or enrobing a compacted slug wherein the level of compaction of the compacted powder is less than that necessary to reach the industry standard for the discrete slug of compacted powder to be described as a tablet.

In practising the method of the invention, the films are caused to deform to conform with the external surface of the pocket and the compacted powder slug, the films effectively forming a secure capsule, by being wrapped around the powder slug. Vacuum chamber or vacuum bed apparatus, in which the films and powder are located in a suitably shaped support and

exposed to conditions of vacuum (or substantially reduced pressure) can be modified and used for this purpose. Such apparatus may be based on commercially available vacuum chamber or vacuum bed apparatus, suitably modified. Vacuum forming techniques result in the compacted powder being completely enclosed and encapsulated within a film, leading to a capsule containing compacted powder, such capsule having enhanced and controllable properties over dosage forms currently available, such as conventional tablets. The powders to be compacted are typically subjected to pressures between, but not limited to, 5-15 mega pascals. Examples of powders compacted and enrobed include paracetamol, ibuprofen, sorbitol and multivitamin. Other powder fills which are contemplated are antacid, anti-inflammatory, anti-histamine antibiotic and anti-cholesterol drugs.

The film should be a material which is suitable for human consumption and that has sufficient flexibility and plasticity to be vacuum formable. Some film materials have suitable properties in their natural condition, but commonly it will be necessary to pre-treat the film material so that it is vacuum formable. For example, it may be necessary to expose the film material to a solvent therefor; for instance certain grades of polyvinyl alcohol (PVA) will vacuum form after application of a small amount of water to the surface thereof or when exposed to conditions of high humidity. A

further generally preferred possibility, is to use a film of thermoplastic material (i.e. material capable of deforming plastically on heating) with the film to be in heat-softened condition prior to being thermoformed by exposure to vacuum. Suitable thermoplastic materials include modified cellulose materials, particularly hydroxypropyl methyl cellulose (HPMC) and hydroxypropyl cellulose (HPC), polyvinyl alcohol (PVA), polyethylene oxide (PEO), pectin, alginate, starches, and modified starches, and also protein films such as soya and whey protein films. The currently preferred film material is HPMC. Suitable film materials are currently available.

When using thermoplastic film, the film is typically heated prior to application to pocket or compacted powder slug, so that the film is in a heat softened deformable condition. This can be achieved by exposing the film to a source of heat e.g. an infrared heater, infrared lamps, a heated plate a hot air source etc. In the process described, a range of temperatures may be used, but by way of example only, where films of different thickness may be utilized for the first and second films in the process, a first film forming temperature of around 150 degrees centigrade may be used and for the second film forming stage, a range of approximately 70-80 degrees centigrade may be used.

During the enrobing process, films may be caused to overlap, preferably a minimum of 1.5mm-2mm. Compacted powder slugs may preferably have a sidewall height of about 3mm and films may be caused to overlap substantially completely over the sidewall area.

The film material may include optional colourings, e.g. in the form of food dyes such as FD and C yellow number 5, and/or optional flavourings, e.g. sweeteners, and/or optional textures etc in known manner.

The film material typically includes plasticiser to give desired properties of flexibility to the film in known manner. Materials used as plasticisers include alpha hydroxy acids such as lactic acid and salts thereof, maleic acid, benzyl alcohol, certain lactones, diacetin, triacetin, propylene glycol, glycerin or mixtures thereof. A typical thermoplastic film formulation is HPMC 77% by weight, plasticiser 23% by weight.

The film suitably has a thickness in the range 20-200 microns, conveniently 50 to 100 microns, e.g. at about 80 microns, with appropriate film thickness depending on factors including the size and form of the tablet. Films of different thickness may be used, e.g. a film of greater thickness may be used in the first stage of the enrobing process, say 125

microns thickness and a film of lesser thickness may be used in the second stage of the enrobing process, say 80 microns thickness.

Because of the nature of the film forming process according to the present invention, under certain circumstances, e.g. where the powder to be compacted contains particles which, under compaction, have the ability to pierce film, it may be advantageous to have the thickness of the film formed in the pocket to be greater than that of the film which is to cover the remainder of the compacted powder slug (in the second and final phase of enrobement of the compacted powder). Such differential thickness may give rise to certain advantageous structural features of the resultant capsule; the capsule may be generally more robust and so may be more safely stored and handled (generally thicker film on the capsule), but such capsule also possessing a smaller area (window) of weaker, thinner film which can give rise to quicker release characteristics by the thinner film will dissolving more quickly when exposed to any given solvent. An advantageous differential film thickness to form a capsule with wall of different thickness, could be e.g. 70/90 micron film coordination to produce capsules which are robust but which release their contents quickly, through a window of thinner film.

Therefore films of different thickness may be used in the enrobing process, and to give a further examples, a film of

greater thickness may be used in the first stage of the enrobing process, a maximum of 200 microns and a minimum of 70 microns but say preferably 125 microns thickness and a film of lesser thickness may be used in the second stage of the enrobing process, a maximum of 125 microns and a minimum of 50 microns, but say preferably 80 microns thickness. When making multiples of enrobed compacted powder slugs, the spacing of the compacted powder slugs can be important. If the compacted powder slugs are positioned too closely together, the film is not able to fully thermoform between them. For example, a spacing between the adjacent compacted powder slugs of about 4mm has been found to give good results, the film being able to fully adopt the vertical sidewall of the compacted powder slug to a distance of about 2mm before it begins to curve away from the side of the compacted powder slug.

According to one aspect of the invention, the method involves forming two separate overlapping half coatings of film, effectively on the compacted powder slug. The method preferably involves, first forming a film in a pocket, then compacting a powder slug into the film lined pocket, thereby effectively coating/encapsulating a substantial portion of a

powder slug within a film formed into a partial capsule, removing the remaining film material not coating the compacted powder slug e.g. by cutting, then coating the remaining half of the compacted powder slug, with overlapping portions of the two coatings sealed together to provide a sealed complete enclosure for the slug, and again removing remaining surplus film material not coated on the slug. It may be necessary to apply adhesive material between the overlapping film coatings e.g. to the surface of the film layers, to ensure the formation of an effective seal therebetween and to make the resultant capsule tamper-evident. The adhesive material conveniently has the same composition as the film, but with a greater proportion of plasticiser, e.g. 93% to 98% by weight plasticiser, so as to provide a less viscous material. The adhesive material may be applied, e.g. by use of a roller, spraying etc. A typical adhesive formulation, with % representing % by weight, is BFMC 4%, lactic acid 77%, water 19%.

The compacted powder slug and capsule conveniently include a generally cylindrical side wall portion, with two half coatings overlapping on this side wall. Tablets of circular symmetrical form with a circular cylindrical side wall are very common, but other forms e.g. generally oblong and oval, again including a generally cylindrical side wall, are also known.

It may be also advantageous or desirable to apply adhesive material e.g. as described above, to the surface of compacted powder slug prior to the final stage of coating, to promote adhesion of the second portion of the film thereto. Again, this may be achieved by e.g. use of a roller, spraying etc.

A plurality of tablets in an array may be conveniently coated simultaneously, using a suitably large sheet of film material.

This invention is now further described in detail, by way of example only, with reference to the drawings. Steps a-k show the basic compaction and enrobing apparatus and process.

The drawings show the various stages of a powder compaction/enrobing process.

Figure 1 shows the mechanism of the basic steps of powder compaction and enrobement via steps a-l:

- a. A first film (1) is laid upon a platten (2). Lower piston (3), slideable in cylinder (4) incorporates vacuum port (5).
- b. Film (1) completely drawn down into cylinder (4) by a vacuum created by vacuum port (5) and said film (1) also

15

resting on the crown of lower piston (3), to form a pocket shape.

- c. A quantity of powder (6) is introduced over the pocket of film and upper piston (9) moves downward towards the lower piston (3) compressing a quantity of powder (6).
- d. A compacted powder slug (7) resulting from the completion of step c.
- e. Cutting of film by the introduction of cutting tool (10) to form an isolated semi enrobed slug of compacted powder.
- f. Lower piston (3) begins to move upwards, thereby also urging compacted powder slug (7) upwards.
- g. Lower piston (3) comes to rest, positioning compacted powder slug (7) proud of platen (2)
- h. Introduction of a second film (8) over platen (2) and also loosely stretching over compacted powder slug (7)
- i. Second vacuum is applied drawing second film (8) around and closely in association with the upper portion of compacted powder slug (7), second film (8) thereby wrapping itself around the upper part of the compacted powder slug (7).
- j. Cutting tool (12) descending and trimming off excess unwrapped film from powder slug (7).
- k. Fully enrobed powder slug, has been ejected from cylinder(4) by the further upward movement of lower piston (3) and has the loose ends of the films ironed and sealed by irons (13) .

1. Shows a fully enrobed tablet with ironed seams.

Figure 2 depicts a variation of the basic process described by figure 1.

Steps a1 and b1 show a second pre-formed film pocket, formed by a second vacuum forming pocket (14) being lowered onto the platten immediately above a partially enrobed powder slug as shown in step f of figure 1. Once the opposing film pocket is in position lower piston (3) moves upwards thus pushing compacted partially enrobed powder slug also upwards and into the cavity of the second pre-formed film pocket, thus capping the partially enrobed powder slug to form a fully enrobed capsule, enrobed by two pockets of film. The capsule is then released, trimmed and ironed as mentioned previously.

Figure 3 depicts a further variation of the basic process described by figure 1.

Step a2 shows a powder slug as in step f of figure 1, and like figure 2 a second pre-formed film pocket is introduced, but this time it is a shallow pocket, formed by a second shallow vacuum forming pocket (15), such to only coat the top of the powder slug and to form a seal at the circumference of the very edge of the cylindrical

portion of the powder slug. Steps a2-d2 show this revised process. This process gives rise to a capsule with a different type of seal which gives rise to different properties in the capsule.

Figure 4 depicts another variation of the process described by figure 1.

However the basic process is essentially duplicated to form a capsule which contains two distinct half doses of powder. The basic process as described in figure 1 is carried out up to step f, in duplicate, which is basically steps a3-c3 in figure 4. The main differences at this point in figure 4, are that the two opposing pockets filled with compacted powder (16,17) are half size in depth, and the top of the powder slugs are essentially flat, rather than rounded. Step c3 may include the laying down of an intermediate film on the surface of the half slug. Steps d3-f3 show the bringing together of 2 half slugs to form a single capsule, comprised of 2 parts. Step g3 shows a compartmentalized capsule. The advantages are at least 2 separate doses of active ingredients can be incorporated into 1 capsule, under perhaps different compaction pressures etc. This gives rise to further flexibility and options as to the performance of the new dosage forms.

The process described, and in conjunction with the quantity of powder used, with the careful positioning of the co-acting pistons during the compaction process, can facilitate the formation of powder slugs having various levels of compaction. As previously described, these varying levels of compaction are allowed in the powder slugs because the slugs are enrobed within a film, and it is this film enrobement which provides the slug with the necessary integrity it needs so that it can function as a convenient and stable dosage form. The process and apparatus can be modified such to produce capsules with varying properties, which have advantages over tablets and conventional capsules already known in the art. For example, a capsule according to the present invention containing a powder with a low compaction, could produce extremely favourable quick release characteristics, suitable, e.g. for a fast acting analgesic; the film can be both designed to be smooth/flexible, to allow the capsule to quickly and relatively painlessly travel to the intended site of drug delivery through the digestive tract, and also be designed to dissolve at or near the intended site of drug delivery. The lower compaction of the powder in the capsule can also aid smooth travel of the capsule in the digestive tract, as the contents of the capsule can be designed to be compressible and mobile, thus

allowing the capsule to be bent and/or compressed as it travels through the body so that it can conform to the shape of a more restricted part of a passage, squeeze through it and so continue its journey through the digestive tract with less hindrance. Such dosage forms may find themselves especially useful where a patient finds difficulty in swallowing, has a painful or restricted digestive tract, or there is some other reason why a dosage form is required to be more mobile and less aggressive to the internals of the body.

The following methods are given by way of example and it is not intended to limit the invention in any way:

Example 1

Consumable items:

Film 1 - 125micron thickness, hpmc plasticised with lactic acid 15%, and triacetin 5%, processing aids starch 1% and sorbitol monostearate 0.25%.

Film 2 as film 1 but 80 micron thickness.

Glue applied to overlap area of first film - benzyl alcohol 45%, triacetin 50%, hpmc E15 Premium (Dow Chemical Corp.) 5%

Process description

Film 1 is thermoformed into single or multiple tablet/caplet shaped pockets in a platen, each pocket containing a lower piston that can be raised or lowered as necessary to suit standard sized tablets and caplets. The tablet shaped pocket also has a raised edge profile around the top perimeter of the pocket. This edge profile is raised 1mm above the platen surface and has a land width of 0.35mm. The vertical sidewall of these pockets is typically 3mm deep.

The thermoforming operation involves the film acting as a membrane dividing the two halves of a vacuum chamber, which are separately controlled. The chamber above the film contains a flat heated platen at a temperature of approximately 150°C. Vacuum is drawn above the film causing it to be held against the heated plate for a period of 1 to 5 seconds preferably 3 seconds. The vacuum in the upper chamber is maintained whilst vacuum is also applied to the lower chamber. At this stage the film remains against the heated platen. Once the vacuum level in the lower chamber reaches at least -0.65 bar the vacuum in the upper chamber is released to atmosphere or replaced by positive pressure, this forces the film downwards away from the heated platen and onto the tablet pocket shaped tooling below. In this way the film adopts the shape of the tablet pockets in the lower tooling.

Powder dosing and film 1 cutting

A dosing assembly is then placed over the film formed pocket. This consists of a location mask which sits on location dowels in the platen, and a dosing sleeve that rests directly above the film formed pocket, and sits on the raised edge profile. The dosing sleeve exactly matches the dimensions of the film formed pocket. A dose of powder is deposited into the dosing sleeve and falls into the film pocket. Compaction is achieved via a compaction piston that advances through the dosing sleeve and sweeps any residual powder down into the film pocket below and compacts it to a fixed stop, such that it does not cut the film, but instead comes to rest directly adjacent to the film. The level of compaction is controlled by the mass of powder being deposited into the dosing sleeve. The piston below the compacted powder tablet is then lowered and either the compaction piston is advanced by a similar amount causing a punch cut through the film as it interferes with the inside of the raised edge profile. Alternatively the compaction piston is replaced by a cut piston which similarly advances and causes a punch cut with the raised edge profile. The fit tolerance between the cut piston and the internal dimensions of the raised edge profile are such that the diametric clearance is no more than 35 microns.

The apparatus is generally of stainless steel , with the piston crowns made of hardened steel. The equipment was machined and supplied by Midland Tool and Design, Birmingham, UK.

The tablet is thus pushed down by the cut piston into the confines of the pocket, and comes to rest on the lower piston. The location mask and dosing sleeve and the waste film web are then removed.

Second film application, cut and iron

The partly enrobed core is then raised upwards within the tooling, such that half of the formed tablet sidewall is above the raised edge profile. The second film has 15gsm of glue applied to its surface via gravure roller and this is advanced over the tablets. The film is then thermoformed in the same manner as described for the first film, except that the film is held above the tablets by a spacer plate, such that the positioning of the film does not damage the top surface of the tablet. It is possible to use a lower heated platen temperature (50-150°C) for the second thermoform, as the film is thinner and softened by the application of glue. This helps to limit the heat exposure of the powder surface. The location mask is then positioned over the tablet and a

second cut piston is lowered. The second cut piston is designed such that it forms a punch cut on the outside edge of the raised edge profile of the lower tooling, with a diametric fit tolerance of no more than 25 microns. The location mask, and second cut piston and waste film web are then removed and the fully enrobed powder core is pushed through a tight fitting tablet shaped heated cylinder (40°C) to ensure the overlap seal is formed.

Example 2

Same conditions as Example 1, but the following step replaces 'Powder dosing and film 1 cutting' stage:

Powder dosing and film 1 cutting

A dosing assembly is then placed over the film formed pocket. This consists of a location mask which sits on location dowels in the platen, and a dosing sleeve that rests directly above the film formed pocket, and sits on the raised edge profile. The dosing sleeve exactly matches the dimensions of the film formed pocket. A dose of powder is deposited into the dosing sleeve and falls into the film pocket. The cut is achieved via the cut piston that advances through the dosing sleeve and sweeps any residual powder down into the film pocket below. The level of

compaction is controlled by the mass of powder being deposited into the dosing sleeve. The cutting piston cuts through the film as it interferes with the inside of the raised edge profile. The cut piston continues to engage with the raised edge for a further 1mm, and in so doing compacts the powder further into the film shell. The fit tolerance between the cut piston and the internal dimensions of the raised edge profile are such that the diametric clearance is no more than 25 microns.

The apparatus is generally of stainless steel , with the piston crowns made of hardened steel. The equipment was machined and supplied by Midland Tool and Design, Birmingham.

The tablet is thus pushed down by the cut piston into the confines of the pocket, and comes to rest on the lower piston. The location mask and dosing sleeve and the waste film web are then removed.

Example 3

Same as example 1, but the tolerance fit for the first cut piston is the same as that for the second cut piston, i.e 25 microns.

25

Example 4

Same as example 2, but the tolerance fit for the first cut piston is the same as that for the second cut piston, i.e 25 microns.

26

EXAMPLE 5

Description of the apparatus and process used for accurately dosing and compacting powder

Apparatus

The apparatus used in the above process consists of the following assemblies:

- A. A platen containing cavities in which the tablets are formed.
- B. A thermoforming unit.
- C. A powder dosing and compaction unit.

Description of Platen

The platen consists of a stainless steel plate with a surface that contains a row of cavities. The cavities have vertical sidewalls and the same cross sectional shape as the tablets that are to be formed, see Drawing 0003. There is a raised edge around each cavity with the section shown in Drawing 0003 Detail P. This is essential feature for the process of cutting the film that is formed over the tablet in the second part of the process. Also note the recessed surface that protects the raised edge and supports the film above the edge prior to first thermoforming operation.

The base of each cavity is formed by the surface of a piston. Each piston is a close fit (maximum diametric clearance of 25 micrometres) in its respective cavity and is held securely downwards into the bottom of the cavity by a compression spring fitted around the stem of the piston. The spring force presses the end of the stem onto the surface of a cam which is used to control the vertical position of the piston and hence the depth of the cavities. Details of the piston shape are shown in Drawing 0002. Note the concave recess in the front face of the piston and the square edge around the recessed face shown in Drawing 0002 Detail P.

Both the pistons and the platen have small holes (approximately 0.5mm diameter) in them to allow a vacuum to be created in and around the tablet cavities during the two thermoforming processes that form part of the process. The vacuum holes in the platen are shown in Drawing 0003 and the vacuum holes in the piston are shown in Drawing 0002.

Views of the complete platen and piston assembly are shown in Drawing 0001

Description of Thermoforming Unit

The thermoforming unit consists of a flat heated plate mounted in a chamber that leaves only the surface of the heated plate exposed. The chamber is connected to a vacuum source and the vacuum is connected to the surface of the heated plate by an array of small holes (approximately 0.5mm diameter). These holes are an essential feature for the two thermoforming processes that form part of the process. They prevent air bubbles being trapped between the film and the plate. Details of the thermoforming unit, including a view of the holes in the heated plate, are shown in Drawing FD000348.

Description of Powder Dosing and Compaction Unit

The powder dosing and compaction unit is a complex assembly of parts that is mounted above the platen and is connected to the bulk powder supply. It has three functions:

- a. To accurately control the quantity of powder that is placed into each cavity.
- b. To compress the powder into the cavities.
- c. To cut the film that has been formed into the cavities and thus separates it from the 'waste' film.

The quantity of powder is controlled by a slider mechanism. The slider consists of two finger shaped plates that fit together as shown in Drawing 0004 to create cavities of the same width as the tablets but of adjustable length; the depth of engagement of the two plates controls the length of the cavities. The assembly of these two plates is mounted such that it can slide horizontally in a base plate between position 'A' where the cavities are filled with powder and position 'B' where the powder is compressed into the tablet form, see Drawing 0005. The depth of engagement of the two plates thus controls the volume of powder that is transferred in this way.

To ensure that the cavities in the finger plates completely fill with powder there is an agitator mounted above the fill area within the upper housing. This consists of a shaft with 'vaness' of the form shown in Drawing 0007. It is important to note that this is not a spiral screw. When the shaft is rotated the vanes agitate the powder gently without compressing it and thus promote a consistent uniform flow of powder. Drawing 0006 shows the agitator mounted in the 'dosing piston holder', item 1 on the drawing.

Compression of the powder is achieved by means of a row of pistons that are mounted in the 'dosing piston holder' above position 'B'. Drawing 0009 illustrates the compression pistons; note the concave recess in the front face of the piston and the square edge around the circumference of the face as shown in Drawing 0009 Detail P. The pistons pass through bores formed by the finger plates and the base plate as shown in Drawing 0008. Thus powder can be swept through the bores and pressed into the platen cavities when the dosing and compaction unit is mounted on top of the platen. The assembly of the dosing unit and platen is shown in Drawing 0010 Sheet 1 and a section through the complete assembly is shown in Drawing 0010 Sheet 2.

The strokes of the compression pistons are fixed to ensure a fixed size for the finished tablets. The pistons enter the end of the platen cavities in the last 0.5mm of the stroke. This results in a shear cut of the film around the inside edges of the cavities.

Process

Description of Thermoforming Process

The process starts with thermoforming the film onto the platen.

A sheet of film is placed over the platen and the thermoforming unit positioned over it. The thermoforming unit is then pressed onto the film and platen. This creates a split vacuum chamber with the film acting as a membrane that separates the upper chamber (thermoforming unit) and the lower chamber (platen).

The thermoforming process is started by connecting a vacuum to the upper chamber. This pulls the film onto the heated plate, which is at a controlled temperature of typically 180°C*. After an adjustable period of a few seconds* vacuum is also connected to the lower chamber to evacuate the cavities in the platen. Then, when the vacuum level in the lower chamber has reached a set level (typically -0.6barg* to -0.8barg*) and the film heating time* has elapsed, the upper chamber is vented to atmosphere. The resulting pressure difference across the film forms it into the cavities in the platen. The thermoforming unit is then lifted off the platen to complete the thermoforming process.

Note

*The values quoted for the temperature of the heated plate, the film heating time and the lower chamber vacuum level are typical but not exclusively definitive. The optimum values for these parameters are dependent on the physical characteristics of the film being used and thus on the film formulation. In general, different operating parameters will be required for different films.

29

Description Of the Powder Dosing Process

After the film has been thermoformed the dosing unit is located onto the platen.

The cavities in the finger plates are slid under the rotary agitator and held there for a few seconds. Powder from the bulk supply falls under the action of gravity and the rotary agitator to fill the cavities. The finger plates are then slid to position 'B' so that the cavities (now full of powder) are directly above the cavities in the platen. Finger plate 'B' is then moved relative to finger plate 'A' so that the length of the cavities in the finger plates is equal to the length of the cavities in the platen; this ensures that all the powder in the finger plate cavities can be swept out by the compaction pistons.

Description of the Powder Compaction Process

The compaction pistons are pressed through the finger plates and base plate to press the powder into the platen cavities. Applying more force compacts the powder to form firm tablets within the film shells that have been formed into the platen cavities.

The size of the finished tablets is fixed and independent of the quantity of powder transferred because the stroke length is fixed and the force provided to compact the powder is in excess of that required to achieve the full stroke.

Description of the Film Cutting Process

The last 0.5mm of movement of the compaction pistons makes them enter the top of the platen cavities. This cuts the film and thus severs the tablets from the sheet of film they have been formed from.

The action of the compaction pistons entering the cavities in the platen is an important feature of the cutting process. It creates tablets with very well defined edges and overall shape as compared to the alternative method of using separate compression and cut processes.


Note

The cutting of the second film (formed over the top of the top of the tablet in the second part of the process) is achieved in a similar way but in this case the cutting tool is a hollow tablet shaped tool that engages with the outside edge of the raised profiles on the platen to achieve a shear cut.


Draft Timing Diagram for Process


A draft timing diagram for the complete process is shown on the next page to help clarify the sequence of events for the thermoforming, dosing, compaction and cutting processes.

Fig. 1

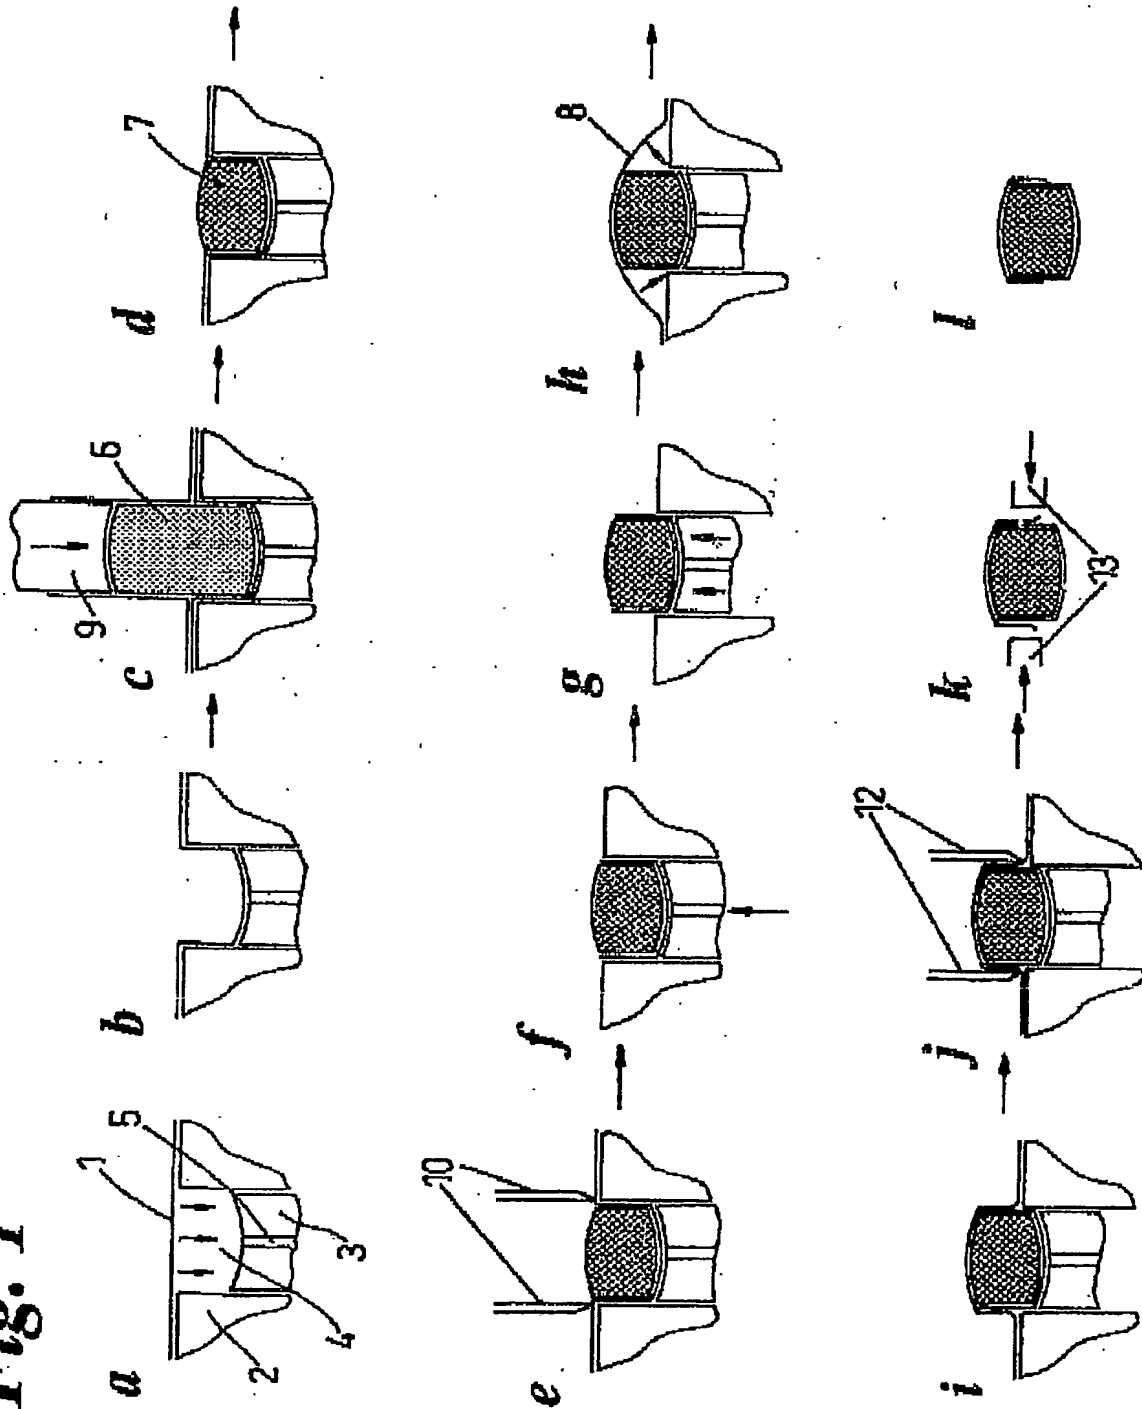

1/4

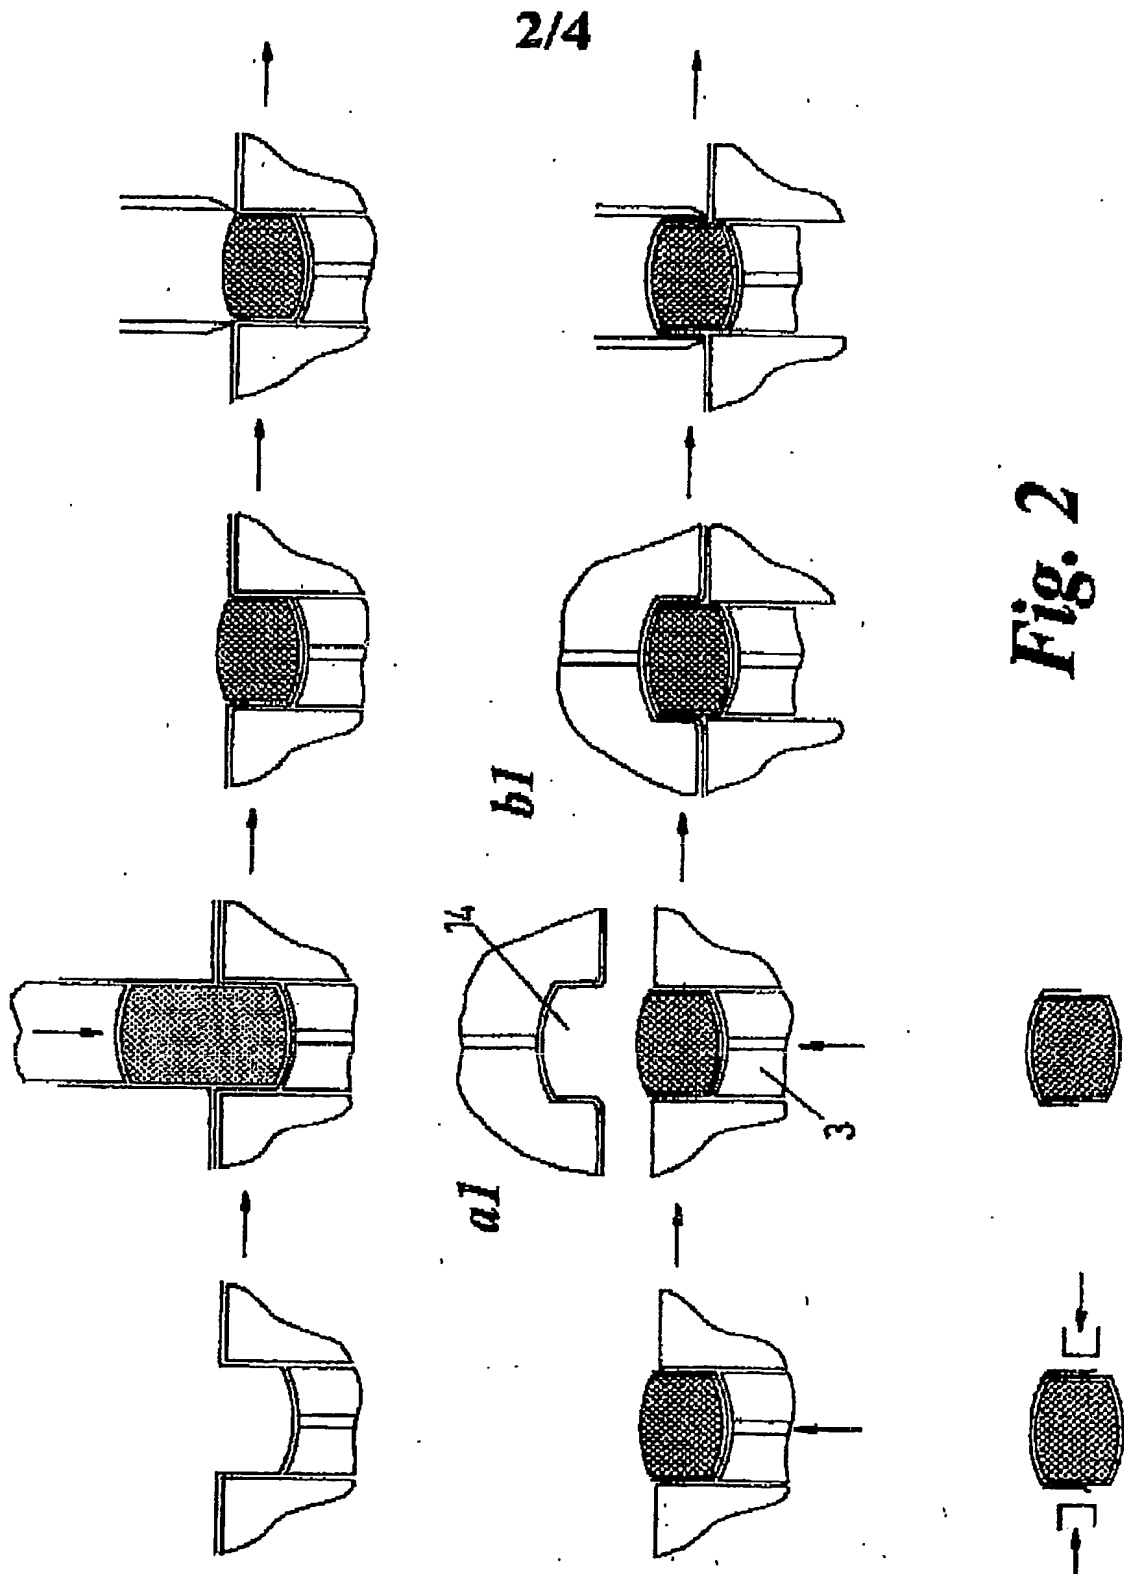

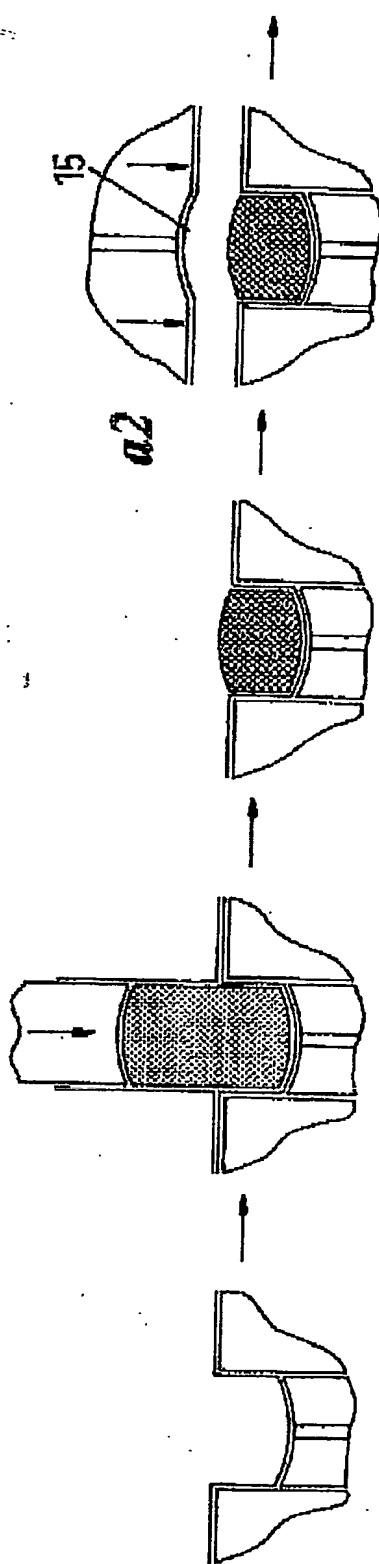

3/4

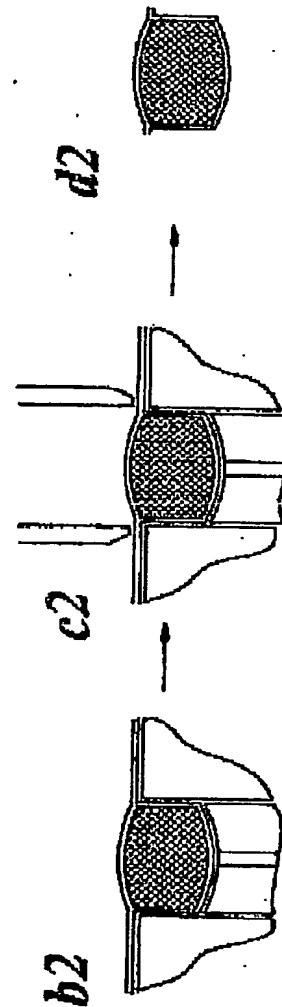


Fig. 3

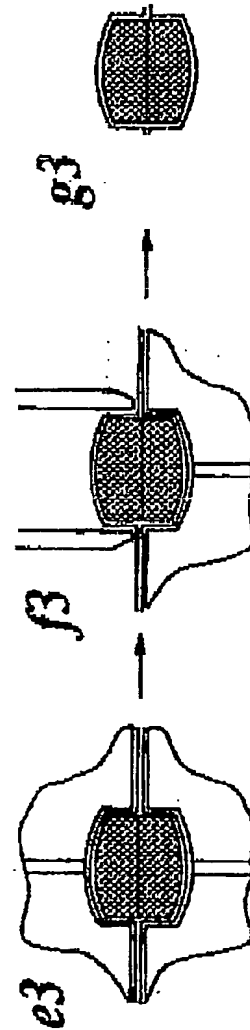
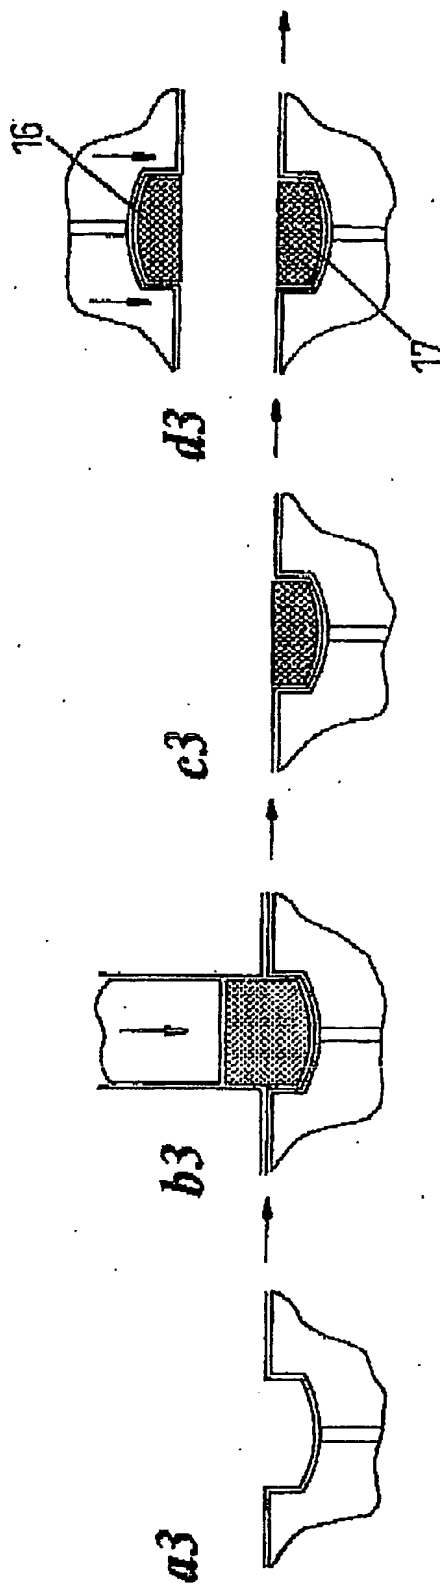


Fig. 4

PART NO. 0001 SHEET 01


BIOPROGRESS TECHNOLOGY, INCORPORATED, 2003.

DATE 24/09/03


BY 1377

DRAWING 0001 SHEET 01

TOP VIEW (FILM SIDE)

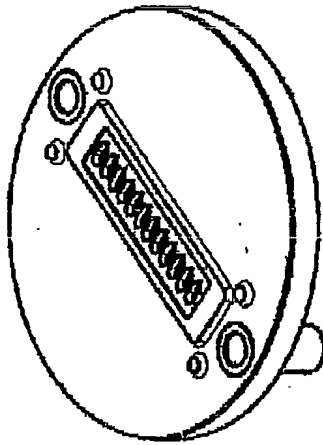

BOTTOM VIEW

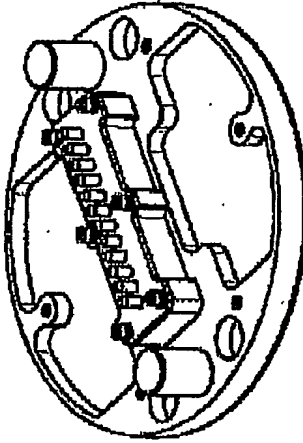

SCALE 1:2

BIOPROGRESS TECHNOLOGY LTD.

DATE

24/09/03

SRC

Lower Platen Assy V7

REVISION

REVISION

REVISION

REVISION

REVISION

REVISION

REVISION

REVISION

REVISION

REVISION

PART No.

EMPLOYEE PATENT 0001

EMPLOYEE PATENT 0001

EMPLOYEE PATENT 0001

EMPLOYEE PATENT 0001


EMPLOYEE PATENT 0001

EMPLOYEE PATENT 0001


EMPLOYEE PATENT 0001

EMPLOYEE PATENT 0001

DRAWING 0003 SHEET 1

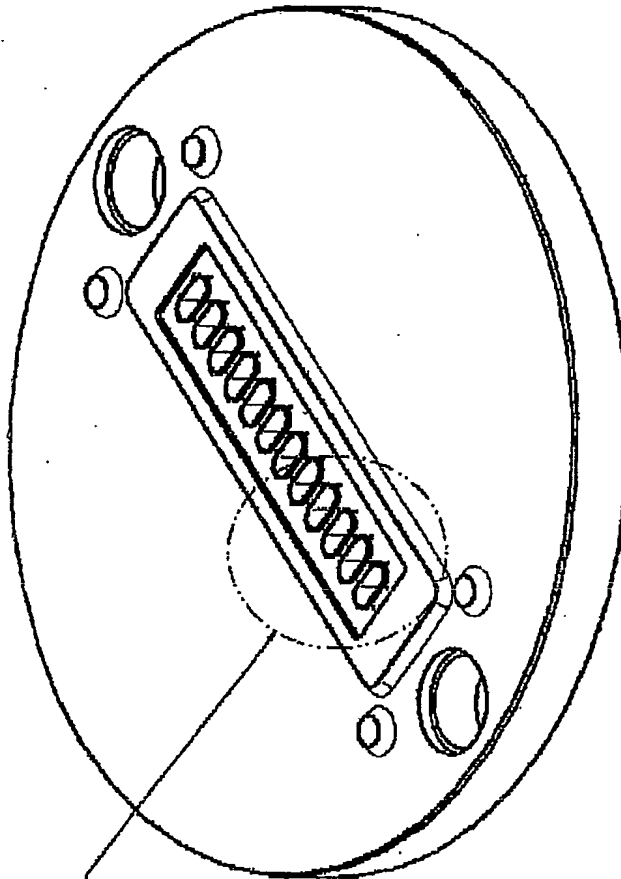

Note recessed surface around cavities and raised edge around cavities
Also note vacuum holes around cavities

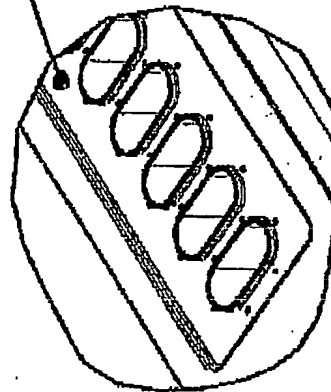

DETAIL 2
SCALE 2:1

LOWER PLATEN

CONFIDENTIAL

DATE

24/09/03

ISSUED BY

SLK.

BIOPROGRESS TECHNOLOGY

NOTE: RAISED EDGE AROUND CAVITIES

DETAIL P
SCALE 1:1



[illegible]

[illegible]

[illegible]


0080920 24-Sep-03 05:09

PART NO. EMROB.PATENT.0007		TITLE AGITATOR		DESCRIPTION SP 100 1 155		PART No. 0007		QTY 01																											
GEOMETRIC TOLERANCE SYMBOLS		OTHER SYMBOLS		DRAWING IN ACCORDANCE WITH B.S. 368		BIOPROGRESS TECHNOLOGY LTD		BIOPROGRESS TECHNOLOGY LTD																											
<table border="1"><tr><td>ORIENTATION</td><td>SY</td><td>CONCENTRICITY</td><td>SK</td></tr><tr><td>PERPENDICULARITY</td><td>AS</td><td>ANGULARITY</td><td>AN</td></tr><tr><td>PARALLELISM</td><td>PA</td><td>IRREGULARITY</td><td>IR</td></tr><tr><td>COINCIDENCE</td><td>CO</td><td>IRREGULARITY</td><td>IR</td></tr><tr><td>SYMMETRY</td><td>SY</td><td>IRREGULARITY</td><td>IR</td></tr><tr><td>IRREGULARITY</td><td>IR</td><td>IRREGULARITY</td><td>IR</td></tr></table>		ORIENTATION	SY	CONCENTRICITY	SK	PERPENDICULARITY	AS	ANGULARITY	AN	PARALLELISM	PA	IRREGULARITY	IR	COINCIDENCE	CO	IRREGULARITY	IR	SYMMETRY	SY	IRREGULARITY	IR	IRREGULARITY	IR	IRREGULARITY	IR	<table border="1"><tr><td>ISSUED BY</td><td>SK</td></tr></table>		ISSUED BY	SK	DATE 01-13-99-03		BIOPROGRESS TECHNOLOGY LTD		BIOPROGRESS TECHNOLOGY LTD	
ORIENTATION	SY	CONCENTRICITY	SK																																
PERPENDICULARITY	AS	ANGULARITY	AN																																
PARALLELISM	PA	IRREGULARITY	IR																																
COINCIDENCE	CO	IRREGULARITY	IR																																
SYMMETRY	SY	IRREGULARITY	IR																																
IRREGULARITY	IR	IRREGULARITY	IR																																
ISSUED BY	SK																																		
SECTION A-A		SCALE 1:1		BIOPROGRESS TECHNOLOGY LTD		BIOPROGRESS TECHNOLOGY LTD		BIOPROGRESS TECHNOLOGY LTD																											
DRAWING 0007		BIOPROGRESS TECHNOLOGY INTERNATIONAL, INCORPORATED, 2002		BIOPROGRESS TECHNOLOGY LTD		BIOPROGRESS TECHNOLOGY LTD		BIOPROGRESS TECHNOLOGY LTD																											
BIOPROGRESS TECHNOLOGY LTD		BIOPROGRESS TECHNOLOGY LTD		BIOPROGRESS TECHNOLOGY LTD		BIOPROGRESS TECHNOLOGY LTD		BIOPROGRESS TECHNOLOGY LTD																											

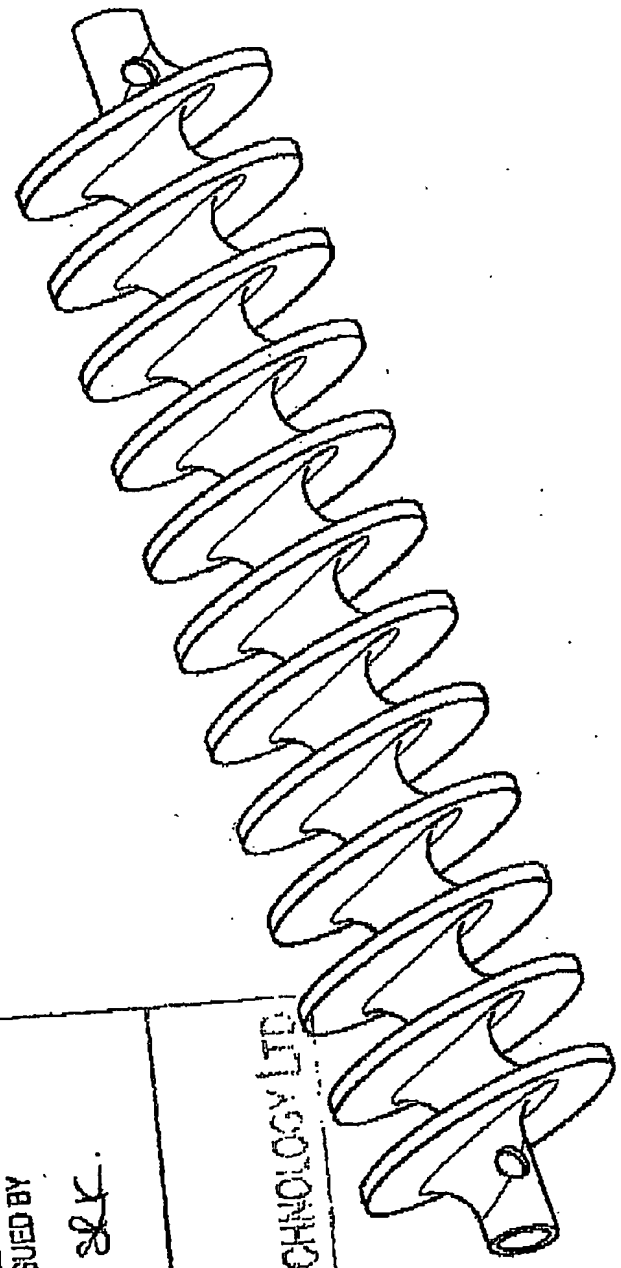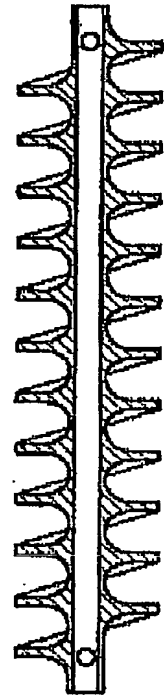

[illegible]

DRAWING BOB SHEET 2

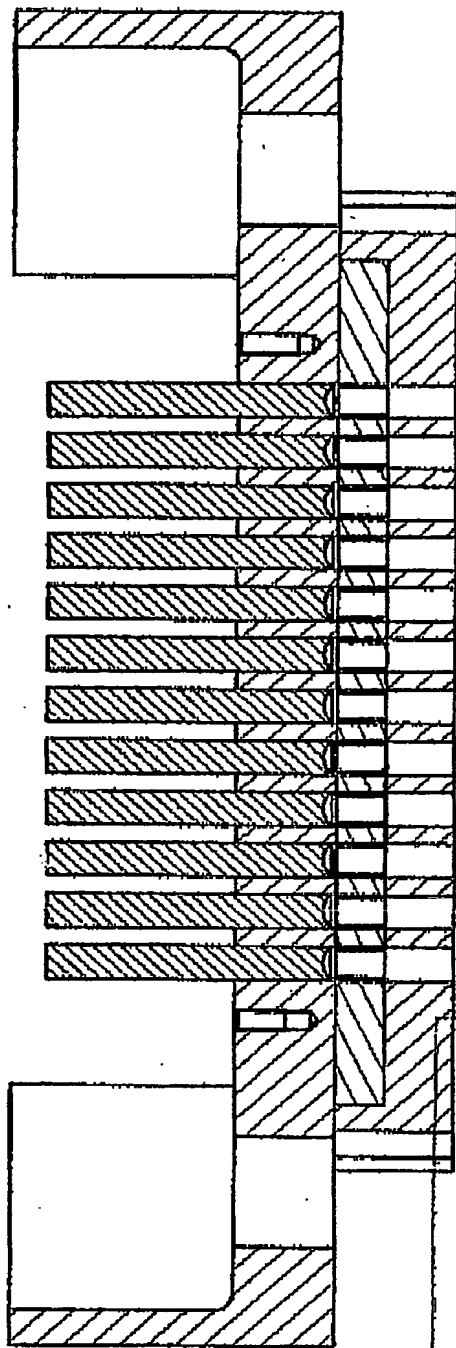

VERTICAL SECTION THROUGH XX

Sheet 1 of 2

55137-1

ADAMS

1780

DR. H. H. WATSON

EE 4.5.			
SED 0.9			

CALE	1-1	DATE
------	-----	------

REC	DATE	23-SEP-67
-----	------	-----------

71083 3071
63 910.71 553

INTER|PRE|DENT

REACTING TO THE CHALLENGES

MS. A. 9.2.1.11

TECHNOLOGY | MACHINE Dosing Assy 5

2711

Express Technology Limited,
Boxford Avenue,
Burgess, Cockfield Lane PE15 6AE
Tel: 0475 131 555 Ext 144

第 2 章

PART No.

五

BE PATENT 0008 | 01

5

[illegible]

[illegible]

0080920 24-SEP-03 05:09

PART NO.	EXPLORE PATENT 0000	TRIM NAME	REDUCED	UNIT NAME	EXPLORE PATENT 0000
				FE 16 DOWEL - 45K	QBIOPROGRESS TECHNOLOGY INTERNATIONAL, INCORPORATED, 2002

GEOMETRIC TOLERANCE SYMBOLS

CONCENTRICITY	SYMMETRICAL	STRAIGHTNESS	ASSEMBLY	PERF. CT.	POSITION	CONCENTRICITY	STRAIGHTNESS	PERF. CT.	SYMMETRICAL
CONCENTRICITY	SYMMETRICAL	STRAIGHTNESS	ASSEMBLY	PERF. CT.	POSITION	CONCENTRICITY	STRAIGHTNESS	PERF. CT.	SYMMETRICAL


UNLESS OTHERWISE STATED
TOLERANCES ARE IN MILLIMETERS
ANGULAR TOLERANCES ARE IN DEGREES
HOLE TOLERANCES ARE IN MILLIMETERS
MACHINED SURFACES
REMOVE BURRS & SHARP EDGES 0.2 RZ
REFER ANGLE TO COMMENTS THAT CASE
NOT TO OVERSTRESS LOWER FINISH

DATE	REV.	DATE	REV.
01/21/00-03			

CONFIDENTIAL

ISSUED BY	slk
DATE	24/09/03
SCALE	1:1
CORE	ENGINEER 23-SEP-03
WAVE	0.078 Hz

MADE FROM
MATERIAL SPEC. AS DETAILS
TREATMENT AS DETAILS
QBIOPROGRESS TECHNOLOGY LTD

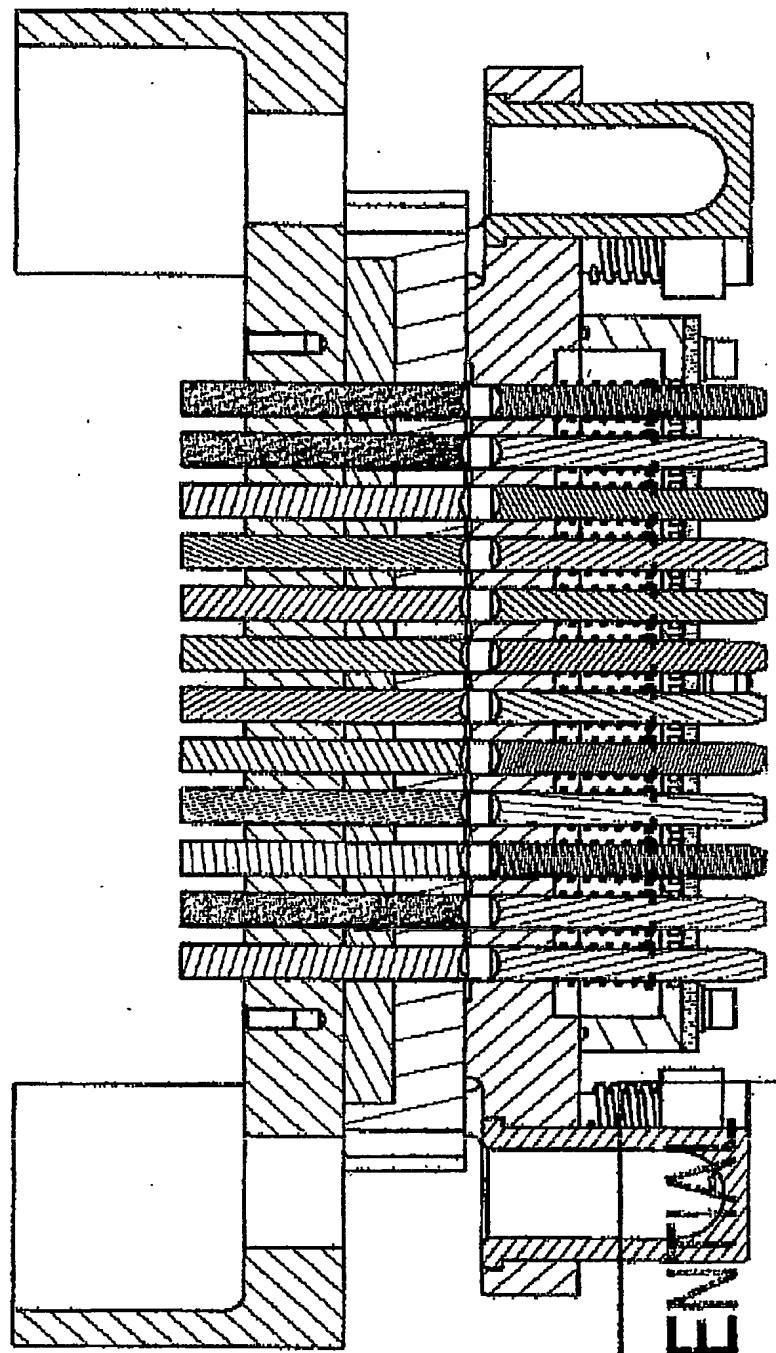

SECTION X-X
SECTION THROUGH X-X ON SHEET 1

2	MACHINE ISSUES EST 5	MACHINE DESIGN ASST. 5	1
1	Lower Pitches Assy VI	LOWER PLATTES FLANGED ASSY VI	1
1	DESCRIPTION	PART No.	QTY



STATION 1 ASSY

TITLE	STATION 1 ASSY	PART No.	QTY
		A3	01

0080920 24 SEP 03 05:09

PART NO. F0000348	
REVISIONS	
IF 1 DES. AND 2 DES. FILE	
BIO PROGRESS TECHNOLOGY INTERNATIONAL, INCORPORATED, 2003.	

DRAWING F0000348

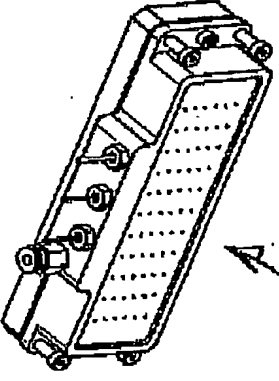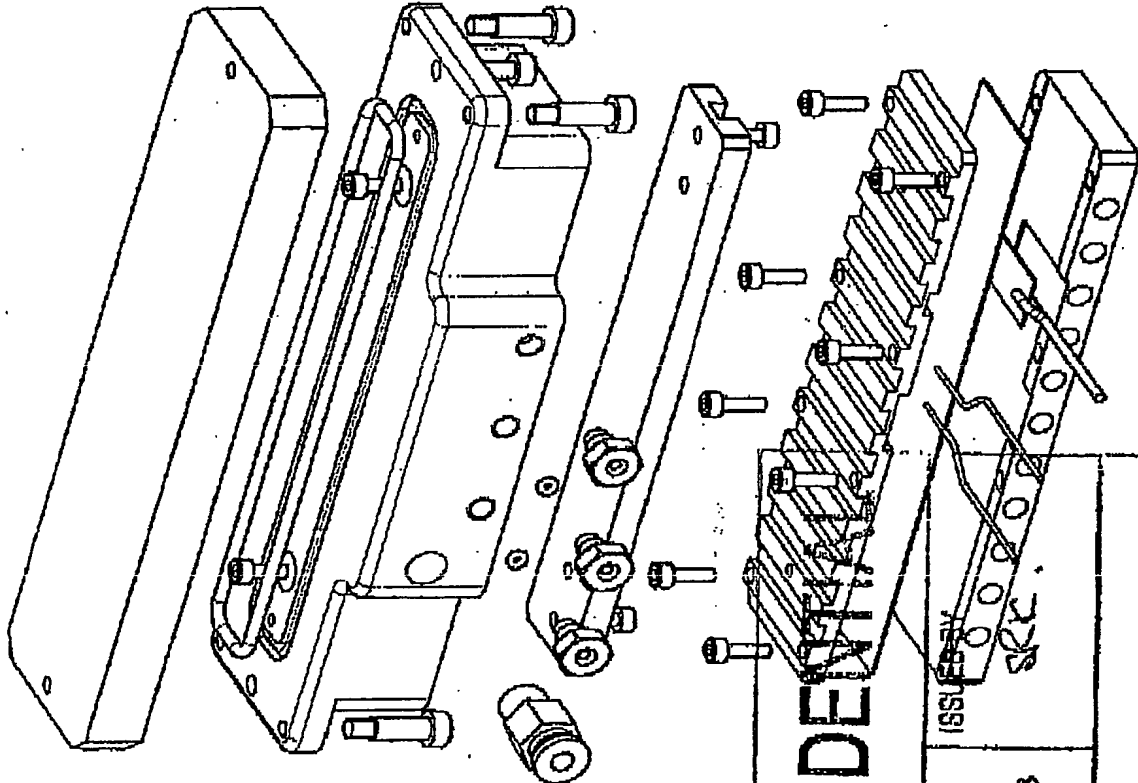

NOTE: VACUUM HOLES

DATE	
24/09/03	
ISSUED BY	
SKC	

CONFIDENTIAL

BIO PROGRESS TECHNOLOGY INTL	
BIO PROGRESS TECHNOLOGY INTERNATIONAL	


THERMOFORMER

1	BASE PLATE	1	HEATING ELEMENT
2	FRAME	1	FASTENERS
3	HEATING ELEMENT	1	FASTENERS
4	FASTENERS	1	FASTENERS
5	FASTENERS	1	FASTENERS
6	FASTENERS	1	FASTENERS
7	FASTENERS	1	FASTENERS
8	FASTENERS	1	FASTENERS
9	FASTENERS	1	FASTENERS
10	FASTENERS	1	FASTENERS
11	FASTENERS	1	FASTENERS
12	FASTENERS	1	FASTENERS
13	FASTENERS	1	FASTENERS
14	FASTENERS	1	FASTENERS
15	FASTENERS	1	FASTENERS
16	FASTENERS	1	FASTENERS
17	FASTENERS	1	FASTENERS
18	FASTENERS	1	FASTENERS
19	FASTENERS	1	FASTENERS
20	FASTENERS	1	FASTENERS
21	FASTENERS	1	FASTENERS
22	FASTENERS	1	FASTENERS
23	FASTENERS	1	FASTENERS
24	FASTENERS	1	FASTENERS
25	FASTENERS	1	FASTENERS
26	FASTENERS	1	FASTENERS
27	FASTENERS	1	FASTENERS
28	FASTENERS	1	FASTENERS
29	FASTENERS	1	FASTENERS
30	FASTENERS	1	FASTENERS
31	FASTENERS	1	FASTENERS
32	FASTENERS	1	FASTENERS
33	FASTENERS	1	FASTENERS
34	FASTENERS	1	FASTENERS
35	FASTENERS	1	FASTENERS
36	FASTENERS	1	FASTENERS
37	FASTENERS	1	FASTENERS
38	FASTENERS	1	FASTENERS
39	FASTENERS	1	FASTENERS
40	FASTENERS	1	FASTENERS
41	FASTENERS	1	FASTENERS
42	FASTENERS	1	FASTENERS
43	FASTENERS	1	FASTENERS
44	FASTENERS	1	FASTENERS
45	FASTENERS	1	FASTENERS
46	FASTENERS	1	FASTENERS
47	FASTENERS	1	FASTENERS
48	FASTENERS	1	FASTENERS
49	FASTENERS	1	FASTENERS
50	FASTENERS	1	FASTENERS
51	FASTENERS	1	FASTENERS
52	FASTENERS	1	FASTENERS
53	FASTENERS	1	FASTENERS
54	FASTENERS	1	FASTENERS
55	FASTENERS	1	FASTENERS
56	FASTENERS	1	FASTENERS
57	FASTENERS	1	FASTENERS
58	FASTENERS	1	FASTENERS
59	FASTENERS	1	FASTENERS
60	FASTENERS	1	FASTENERS
61	FASTENERS	1	FASTENERS
62	FASTENERS	1	FASTENERS
63	FASTENERS	1	FASTENERS
64	FASTENERS	1	FASTENERS
65	FASTENERS	1	FASTENERS
66	FASTENERS	1	FASTENERS
67	FASTENERS	1	FASTENERS
68	FASTENERS	1	FASTENERS
69	FASTENERS	1	FASTENERS
70	FASTENERS	1	FASTENERS
71	FASTENERS	1	FASTENERS
72	FASTENERS	1	FASTENERS
73	FASTENERS	1	FASTENERS
74	FASTENERS	1	FASTENERS
75	FASTENERS	1	FASTENERS
76	FASTENERS	1	FASTENERS
77	FASTENERS	1	FASTENERS
78	FASTENERS	1	FASTENERS
79	FASTENERS	1	FASTENERS
80	FASTENERS	1	FASTENERS
81	FASTENERS	1	FASTENERS
82	FASTENERS	1	FASTENERS
83	FASTENERS	1	FASTENERS
84	FASTENERS	1	FASTENERS
85	FASTENERS	1	FASTENERS
86	FASTENERS	1	FASTENERS
87	FASTENERS	1	FASTENERS
88	FASTENERS	1	FASTENERS
89	FASTENERS	1	FASTENERS
90	FASTENERS	1	FASTENERS
91	FASTENERS	1	FASTENERS
92	FASTENERS	1	FASTENERS
93	FASTENERS	1	FASTENERS
94	FASTENERS	1	FASTENERS
95	FASTENERS	1	FASTENERS
96	FASTENERS	1	FASTENERS
97	FASTENERS	1	FASTENERS
98	FASTENERS	1	FASTENERS
99	FASTENERS	1	FASTENERS
100	FASTENERS	1	FASTENERS

PART No. F0000348

Subject having been
Patented August
1904, Remington Arms Co.
for the use of the same in the manufacture of

Prototype Nrobe Machine - Draft Timing Diagram

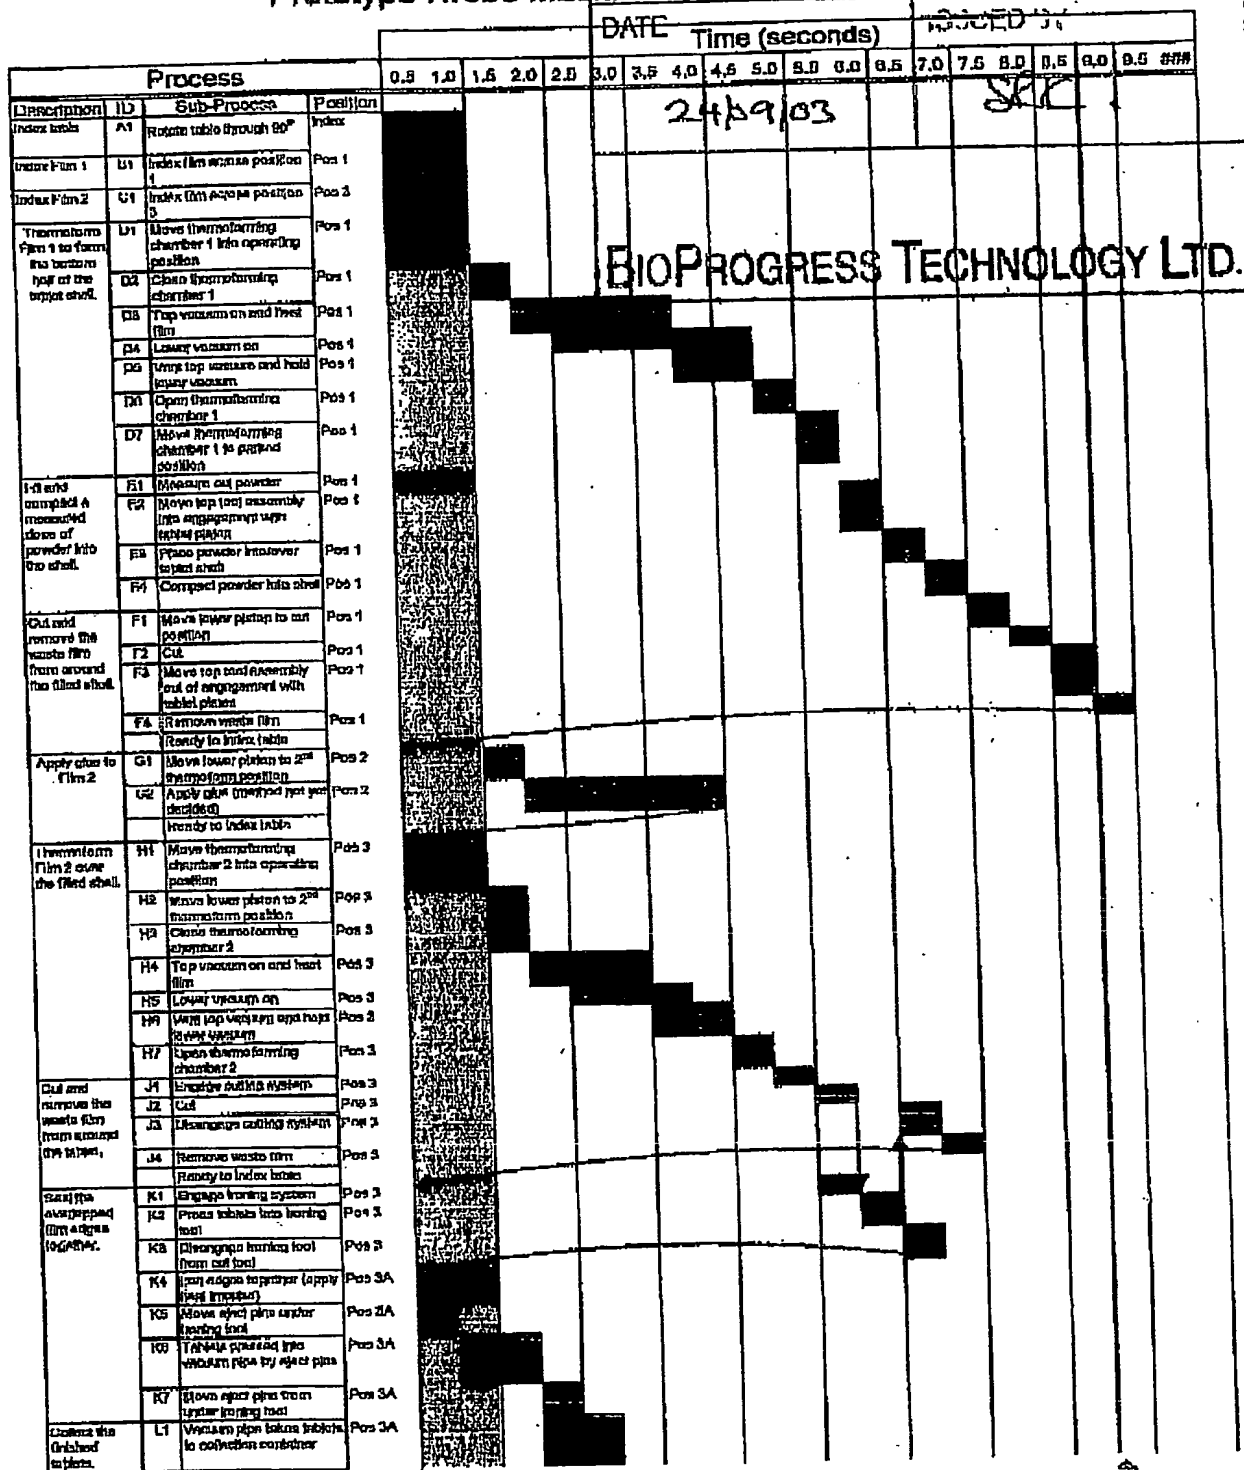

Throughput (tablets per hour)

3200 2100 1600 1000 500 200 100 50 20 10

PCT/GB2004/004097



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.